




HP eStation Zeen Ground Wire Replacement

This guide is used to replace the Ground wire of the HP eStation Zeen MotherBoard.

Written By: dalton hale

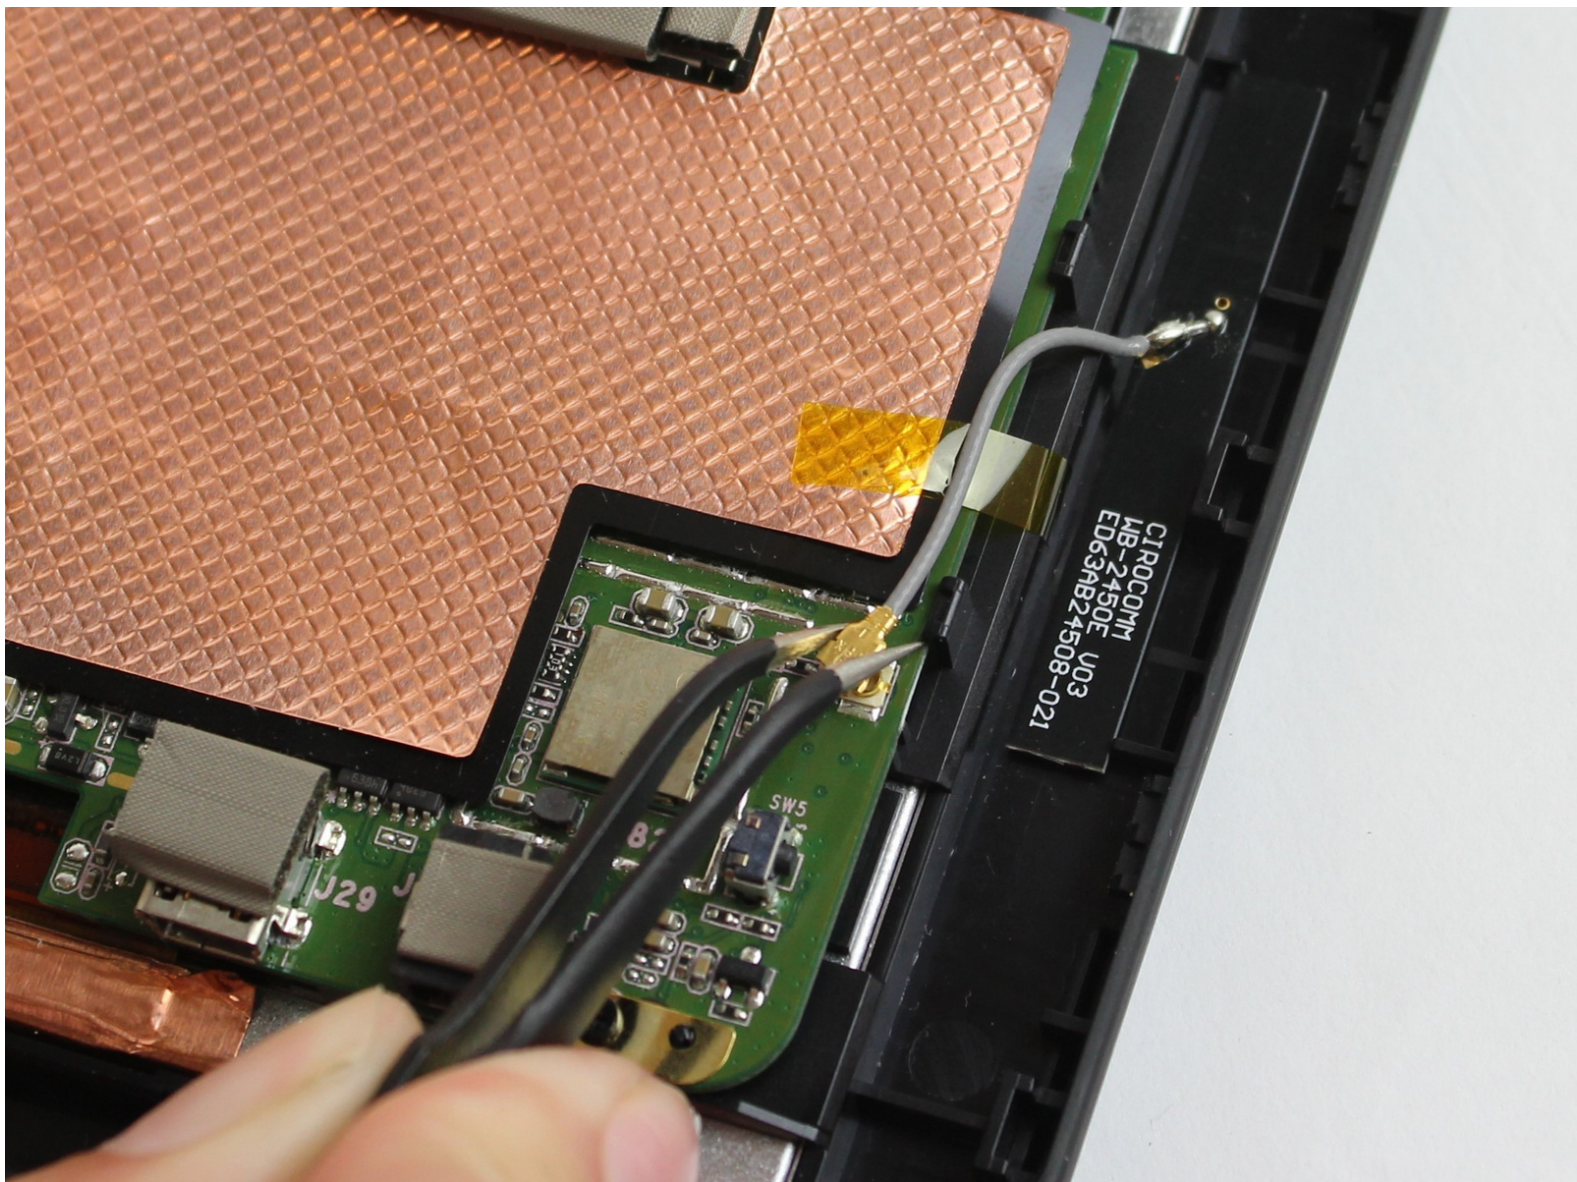

INTRODUCTION


After following the troubleshooting procedures and all of the previous steps did not work it may be time to change the motherboard ground wire.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [Metal Spudger](#) (1)
 - [Soldering Station](#) (1)
 - [Tweezers](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Ground Wire for Motherboard

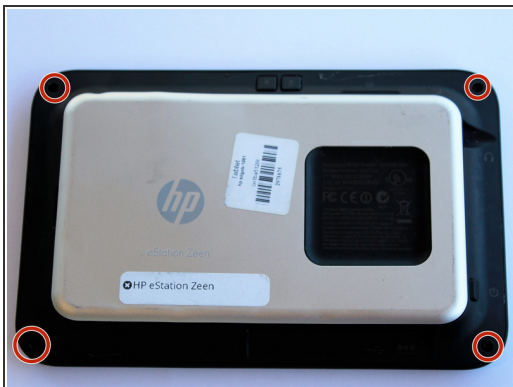


- Remove the screw caps using a metal spudger.
- Remove the four 6mm screws using a Phillips #0 screwdriver.

Step 2



- Unclip each side by inserting the plastic opening tool and slide it along the edges.
- Remove the back panel by lifting the panel away from the device.


Step 3

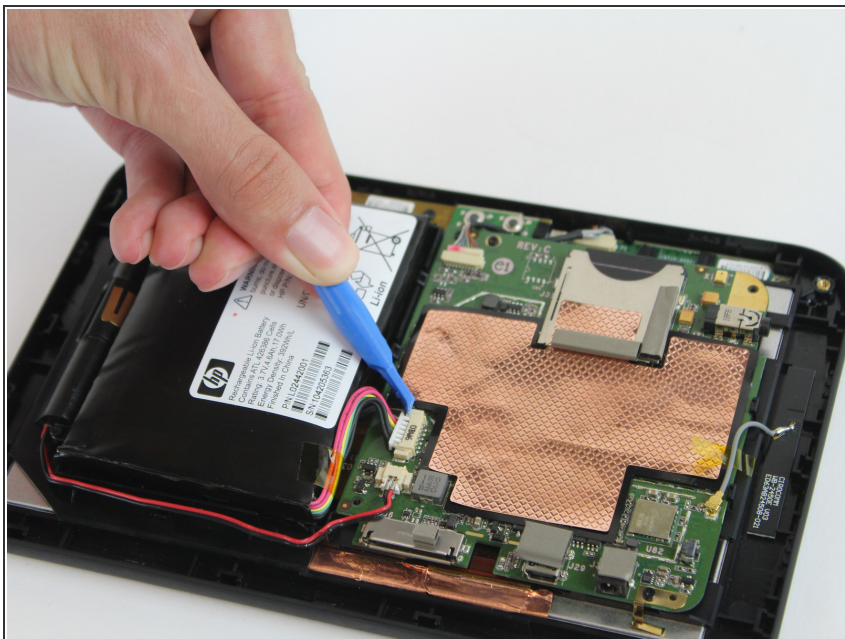

- Disconnect the battery clip using small plastic spudger.


⚠ The clip is fragile.

Step 4

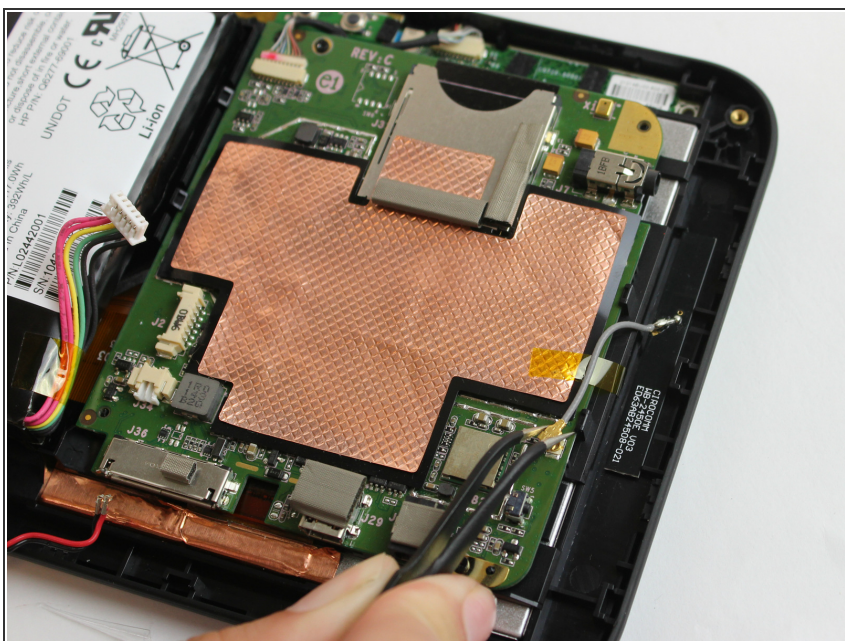

- Unclip the ground wire from motherboard terminal using tweezers.

Step 5

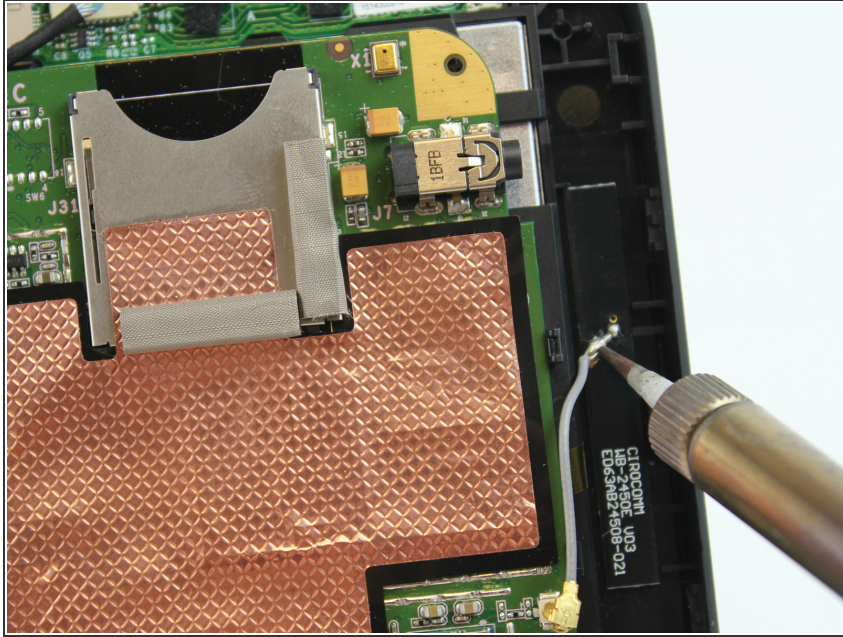

- Remove ground wire using solder iron.

⚠ Heating the motherboard may cause damage.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 02:45:00 PM.